


# Guillotine 599



- High-quality guillotines for commercial use
- Stable metal base with non-slip rubber feet to keep the rotary trimmer securely in place
- Practical format lines on the table facilitate exact alignment of the item being cut
- Sturdy handle with generous hand protection guard
- Ground upper blade made of hardened, re-sharpenable Solingen steel bolted to the solid steel blade holder
- Bolted lower blade of ground and hardened Solingen steel
- High-quality, re-sharpenable blades made of Solingen steel
- Sturdy, solid-steel blade holder for optimum guidance of the screw-mounted upper blade
- Unique automatic safety feature for a clear view of the cutting edge
- Material blade suitable for a wide range of different materials - different grind to paper blades. The full cutting height given cannot always be used with some materials deemed suitable for cutting: the full cutting height should definitely not be used when cutting paper. In this instance, we recommend using a guillotine with a paper blade.
- Stay-down D-bar clamp holds item being cut perfectly in place
- Two scale bars with mm scale for an exact 90° cut
- Adjustable, screw-fastening backstop in metal for quickly finding the right format – can be used on both scale bars
- Extendible front stop up to 210 mm for cutting strips of equal width
- Can be locked to prevent unauthorised use
- DAHLE 599 with material blade
- Practical stand with storage shelf with an optimum working height of 74 cm is optionally available (619)

Article number	00599-21442
Cutting length (mm)	700
DIN	A2
Cutting capacity (mm)	3,5
Table size (overall dimensions) (mm)	750 mm x 550 mm
Features	Material blade
EAN	4007885005997
Suitable accessories	Stand in working height for models 519, 569, 589, 599

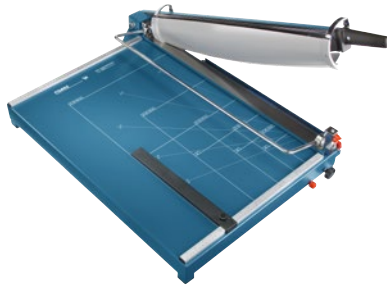

\*The indicated sheet capacity for cutting machines is due to standard paper weight of 80 gsm but is still subject to texture, quality and state of paper. All of such information is based on the general formula 10 sheets = 1 mm stack height and may only be used as an aid to orientation for the selection of the cutting machine.